

HRL 1210W 12 10 /

HRL1210W -


20%



260	(6-9)	20°			8 Eurobat
12 (6)					100%
10 / 15-			U	- 1.67 /	25°
1.10					
40A (5)					
32.1					
	-15°	+50°			
	-15°	+40°			
	-15°	+40°			
120					
25°					
13.5 - 13.8		25°			
1.0 A (
			I_{max}		
14.4 - 15.0		25°			
	25°	6-		*	
F2-Faston Tab 250					
ABS (



178.0±2.0	34±1.0	64.3±1.0	70.5±1.0
-----------	--------	----------	----------

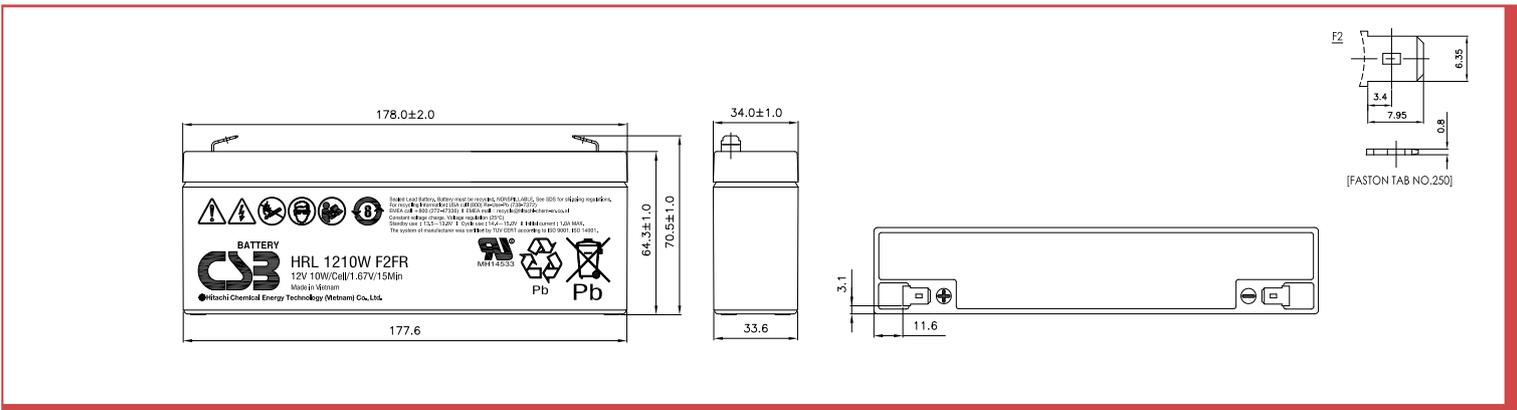

: A (25°)

U_k/T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	19.2	13.7	11.8	10.5	8.84	7.47	5.51	4.24	3.06	2.14	1.66	1.29
1.67	18.3	13.3	11.5	10.2	8.70	7.37	5.43	4.20	3.03	2.12	1.64	1.28
1.70	17.9	13.0	11.3	10.1	8.64	7.32	5.39	4.18	3.02	2.11	1.63	1.27
1.75	17.1	12.5	11.0	9.85	8.37	7.15	5.27	4.10	2.98	2.09	1.62	1.26
1.80	16.3	11.8	10.5	9.50	8.10	6.98	5.14	4.02	2.93	2.06	1.60	1.25
1.85	15.6	11.1	10.0	9.15	7.83	6.81	5.02	3.94	2.89	2.04	1.59	1.24

: / (25°)

U_k/T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	200	147	127	113	95.6	81.5	60.9	47.0	34.1	24.0	18.7	14.7
1.67	193	143	124	110	94.0	80.5	60.0	46.5	34.0	23.9	18.6	14.6
1.70	189	140	121	108	92.9	79.8	59.3	46.3	33.9	23.8	18.5	14.5
1.75	182	134	118	106	91.0	78.9	58.5	46.0	33.5	23.6	18.4	14.4
1.80	175	128	114	103	89.1	77.3	57.2	45.2	33.0	23.3	18.2	14.3
1.85	169	121	109	100	86.6	75.8	55.8	44.5	32.6	23.1	18.1	14.2