

HRL 1223W 12 23 /

HRL1223W -


20%



260	(6-9	20°		8 Eurobat)
12 (6)			100%
23 /	15-		U - 1.67 /	25°
2.10				
130A (5)			
19.9				
		-15°	+50°	
		-15°	+40°	
		-15°	+40°	
227				
25°				
13.5 - 13.8		25°		
2.3 A ()		I _{max}	
14.4 - 15.0		25°		
		25°	6-	*
F2-Faston Tab 250				
ABS (-	-)	



90.0±1.0	70.0±1.0	101.8±1.0	105.6±1.0
----------	----------	-----------	-----------

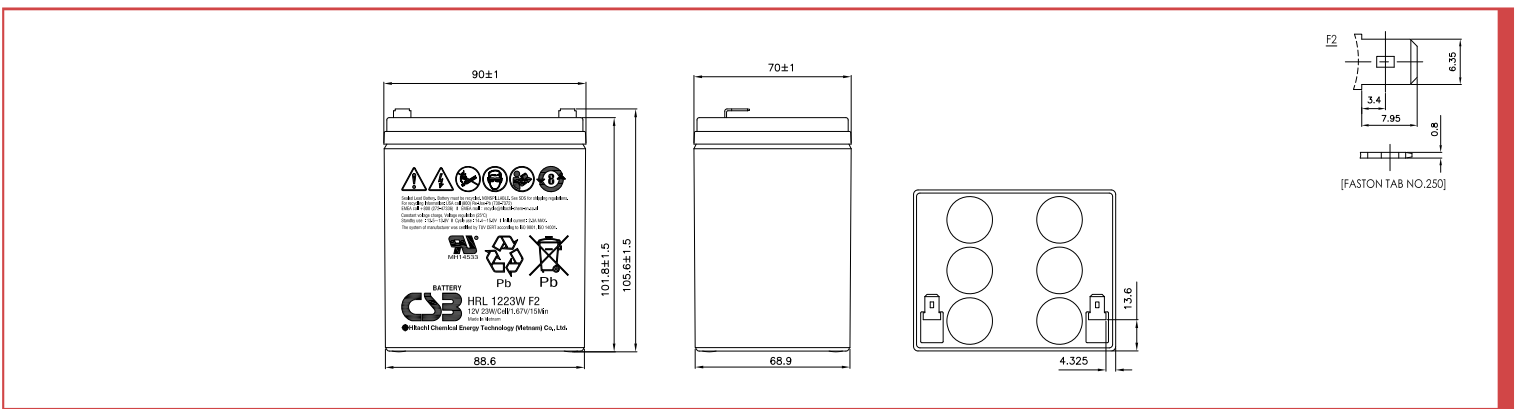

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	50.7	32.9	28.3	25.0	20.3	17.5	12.9	10.3	7.42	5.33	4.22	3.01
1.67	46.7	31.4	27.2	24.2	20.0	17.3	12.8	10.2	7.35	5.28	4.18	2.99
1.70	43.8	30.6	26.6	23.8	19.7	17.0	12.6	10.1	7.29	5.26	4.17	2.98
1.75	39.7	28.4	25.0	22.6	19.1	16.5	12.3	10.0	7.22	5.21	4.14	2.94
1.80	35.2	26.0	23.2	21.2	17.9	15.7	11.8	9.61	7.04	5.09	4.05	2.92
1.85	30.6	22.8	20.7	19.1	16.2	14.3	11.0	8.99	6.58	4.81	3.85	2.78

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	497	337	295	264	221	192	141	114	84.4	62.0	49.8	36.5
1.67	464	326	287	259	219	190	140	113	84.0	61.6	49.5	36.2
1.70	445	317	283	258	217	188	139	112	83.6	61.3	49.2	36.0
1.75	410	301	270	247	209	182	137	111	82.8	60.9	49.0	35.9
1.80	373	278	252	233	199	175	133	109	80.8	59.7	48.1	35.3
1.85	323	252	229	212	183	162	124	102	76.6	57.1	46.4	34.3